




MSW-H09A4/ADR1
MSW-H12A4/ADR1




MSW-H18A4/ADR1




MSW-H24A4/ADR1
MSW-H30A4/ADR1



MSW-H09A4/R1
MSW-H12A4/R1



MSW-H18A4/R1
MSW-H24A4/R1

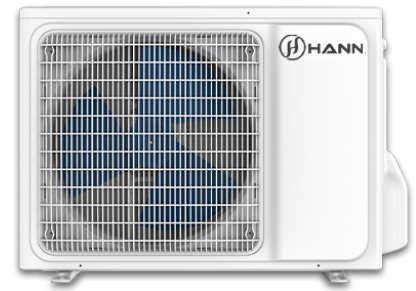

MSW-H30A4/R1



Simsiz idarəetmə



Rəqəmsal ekran



Wi-Fi ready



Yuxu rejimi



Golden Fin



3D hava axını



Auto restart



Sürətli isitmə/soyutma

Daxili blok			MSW-H09A4/ADR1	MSW-H12A4/ADR1	MSW-H18A4/ADR1	MSW-H24A4/ADR1	MSW-H30A4/ADR1
Çöl blok			MSW-H09A4/R1	MSW-H12A4/R1	MSW-H18A4/R1	MSW-H24A4/R1	MSW-H30A4/R1
Gərginlik			220-240V~1/50Hz				
Soyutma	Məhsuldarlıq (soyutma)	kW / Btu	2.75 / 9000	3.58 / 12000	5.30 / 18000	7.10 / 24000	8.75 / 30000
	Elektrik Enerjisi Sərfiyyatı	kW	0.86	1.11	1.65	2.21	2.85
	Enerji Effektivlik Əmsalı (EER)		3.21	3.21	3.21	3.21	3.21
İsitmə	Məhsuldarlıq (isitmə)	kW / Btu	2.85 / 9000	3.68 / 12000	5.53 / 18000	7.38 / 24000	8.90 / 30000
	Elektrik Enerjisi Sərfiyyatı	kW	0.79	1.02	1.53	2.04	2.46
	İstiliyin Faydalı İş Əmsalı (COP)		3.61	3.61	3.61	3.61	3.61
Maksimal Cərəyan Şiddəti		A	5.3	6.8	10.2	13.6	17.5
Freon			R410a	R410a	R410a	R410a	R410a
Sistemdə olan freon miqdarı		q	540	780	1200	1750	2000
Hava Sərfiyyatı		m³ / saat	300/380/650	350/500/700	400/520/1000	600/850/1300	700/920/1500
Səs səviyyəsi	Daxili blok	dB	20/27/33	22/31/36	24/33/39	26/35/41	28/38/49
	Çöl blok	dB	50	51	53	54	55
Çəki	Daxili blok	kq	11	10	12	16	16
	Çöl blok	kq	27	29	38	50	58
Ölçüləri	Daxili blok	mm	810*290*190	810*290*190	970*320*230	1100*320*230	1100*320*230
	Çöl blok	mm	680*420*275	700*540*280	810*530*290	853*655*322	920*700*337
Freon borusunun diametri	Maye	mm	6.35	6.35	6.35	6.37	9.52
	Qaz	mm	9.52	9.52	12.7	15.88	15.88
Kompresorun modeli			QXA-A100T130U	QXA-B139T130U	GSL190CV-C7LU	GSL190CV-C7LU	QXAS-F325N050
İşləmə diapozonu	Soyutma	°C	+18 °C ~ +46 °C				
	İsitmə	°C	-7 °C ~ +24 °C				
İstehsalçı ölkə			Çin				

